

Universal Asynchronous Receiver/Transmitter



UART

Why use a UART?

- A UART may be used when:
 - High speed is not required
 - A cheap communication line between **two** devices is required
- Asynchronous serial communication is very cheap
 - Requires a transmitter and/or receiver
 - Single wire for each direction (plus ground wire)
 - Relatively simple hardware
 - Asynchronous because the
- PC devices such as mice and modems used to often be asynchronous serial devices


UART Uses

- PC serial port is a UART!
- Serializes data to be sent over serial cable
 - De-serializes received data

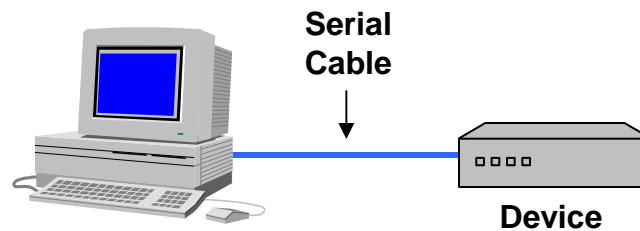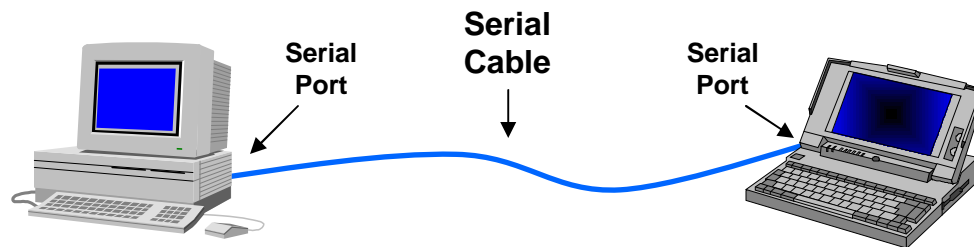


UART Uses

- Communication between distant computers
 - Serializes data to be sent to modem
 - De-serializes data received from modem

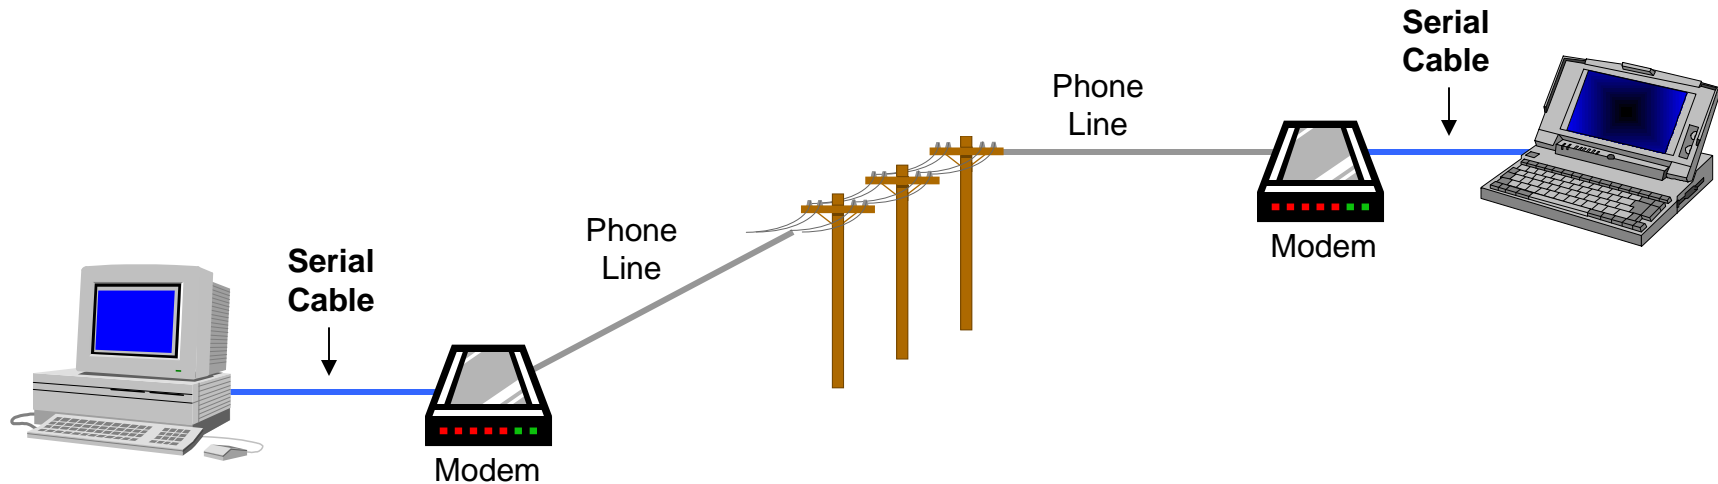


UART Uses

- Used to be commonly used for internet access

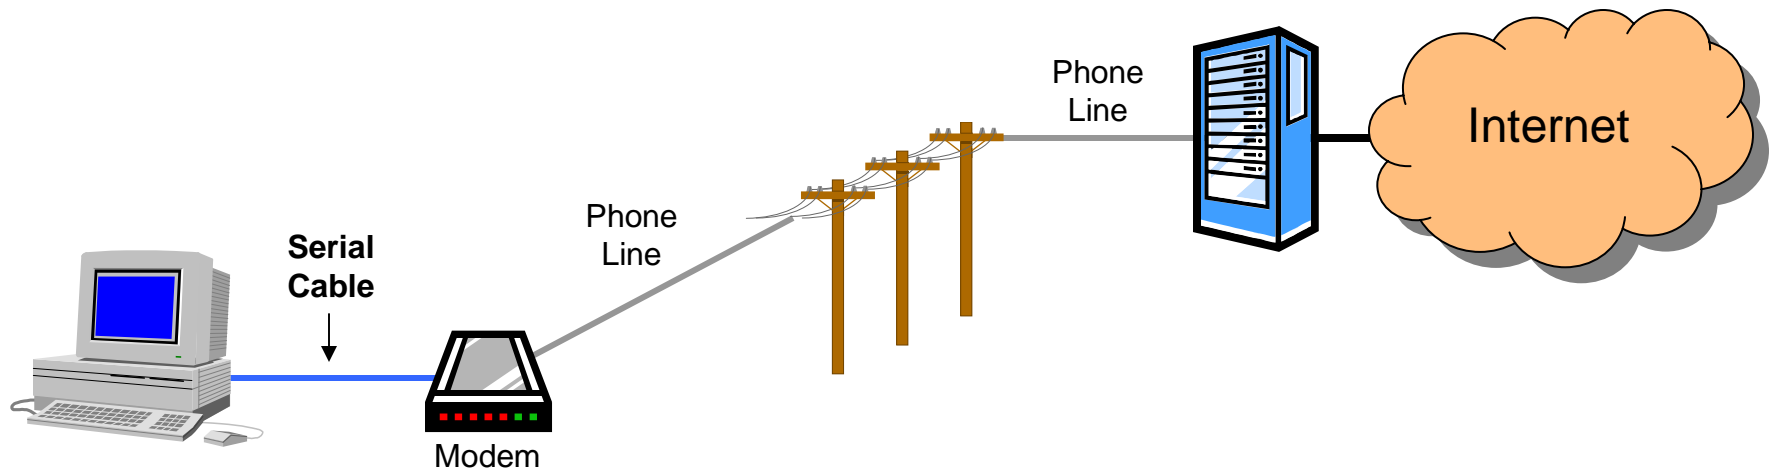

UART Uses

- Used to be used for mainframe access
 - A mainframe could have dozens of serial ports

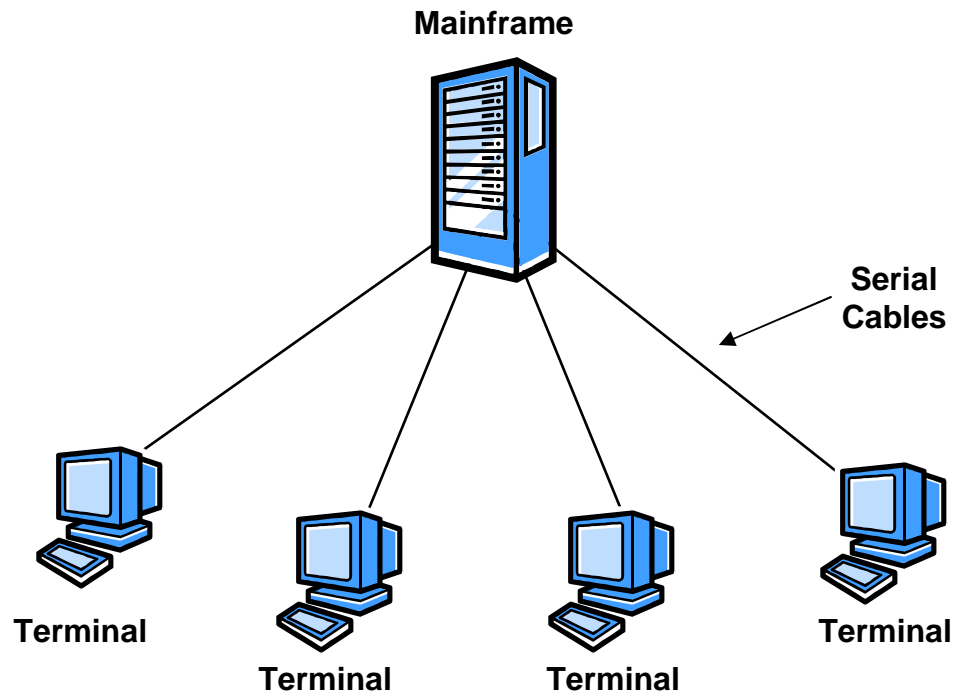

UART Uses


- Becoming much less common
- Largely been replaced by faster, more sophisticated interfaces
 - PCs: USB (peripherals), Ethernet (networking)
 - Chip to chip: I2C, SPI
- Still used today when simple low speed communication is needed

UART Functions

- Outbound data
 - Convert from parallel to serial
 - Add start and stop delineators (bits)
 - Add parity bit
- Inbound data
 - Convert from serial to parallel
 - Remove start and stop delineators (bits)
 - Check and remove parity bit


UART Character Transmission

- Below is a timing diagram for the transmission of a single byte
- Uses a single wire for transmission
- Each block represents a bit that can be a **mark** (logic '1', high) or **space** (logic '0', low)

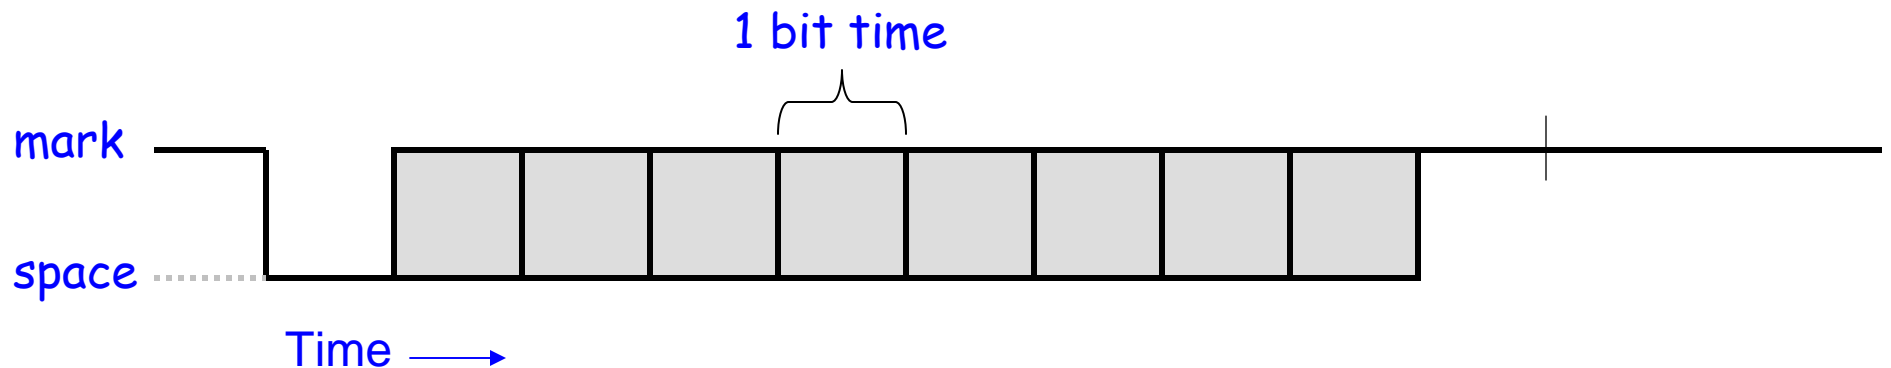


UART Character Transmission

- Each bit has a fixed time duration determined by the transmission rate
- Example: a 1200 bps (bits per second) UART will have a $1/1200$ s or about $833.3 \mu\text{s}$ bit width

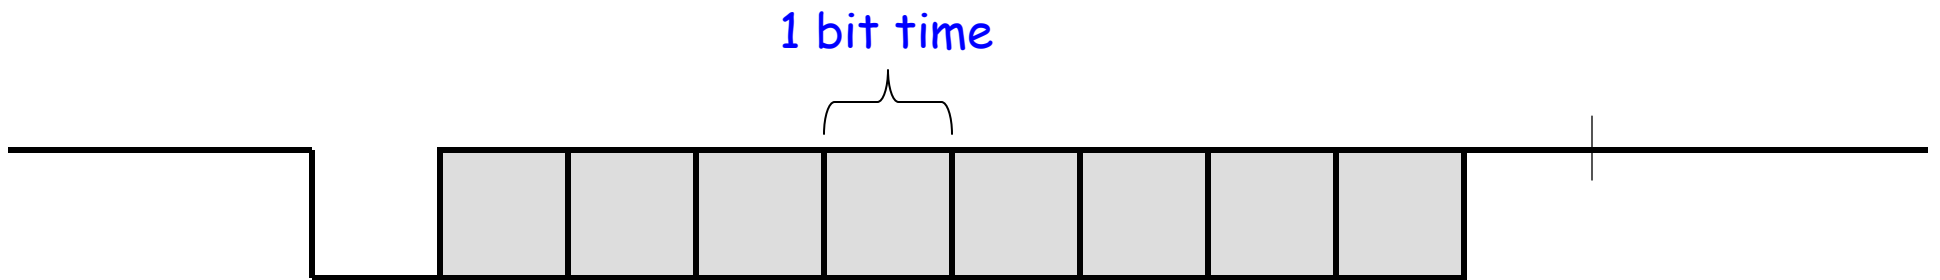


UART Character Transmission

- The **start bit** marks the beginning of a new word
- When detected, the receiver synchronizes with the new data stream

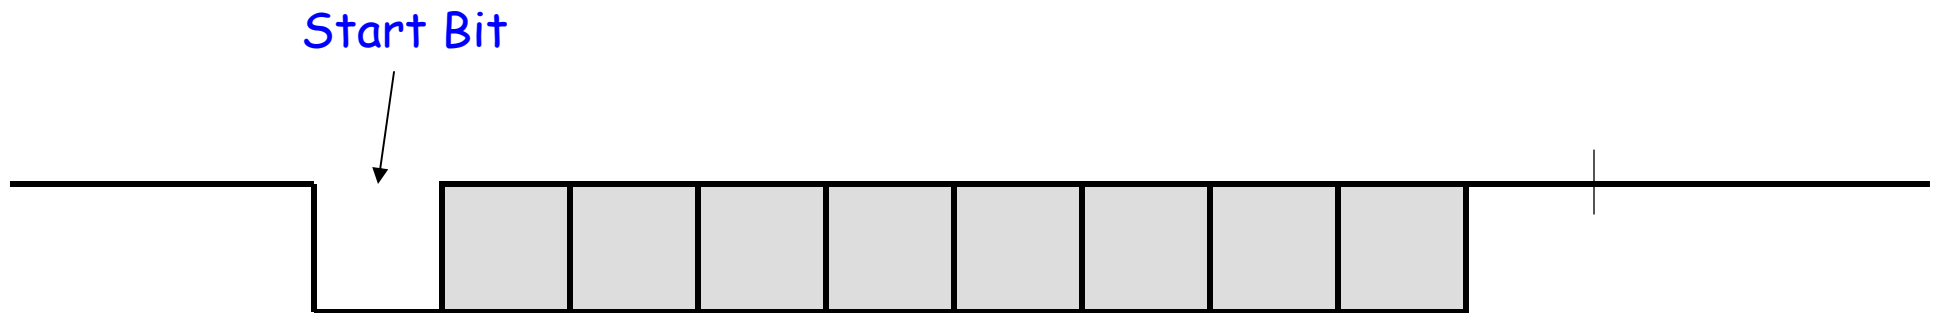


UART Character Transmission

- Next follows the **data bits** (7 or 8)
- The least significant bit is sent first

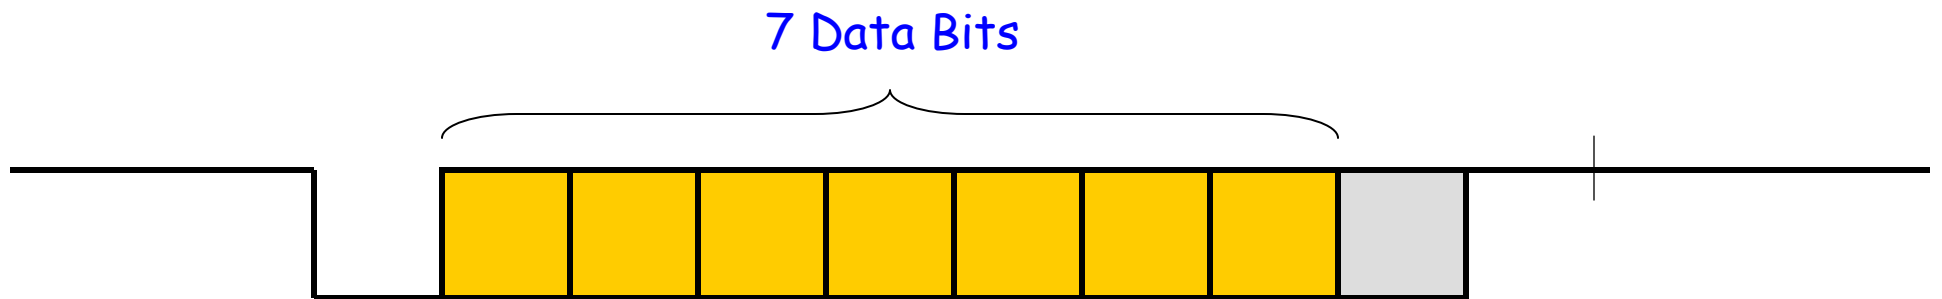


UART Character Transmission

- The **parity bit** is added to make the number of 1's even (even parity) or odd (odd parity)
- This bit can be used by the receiver to check for transmission errors

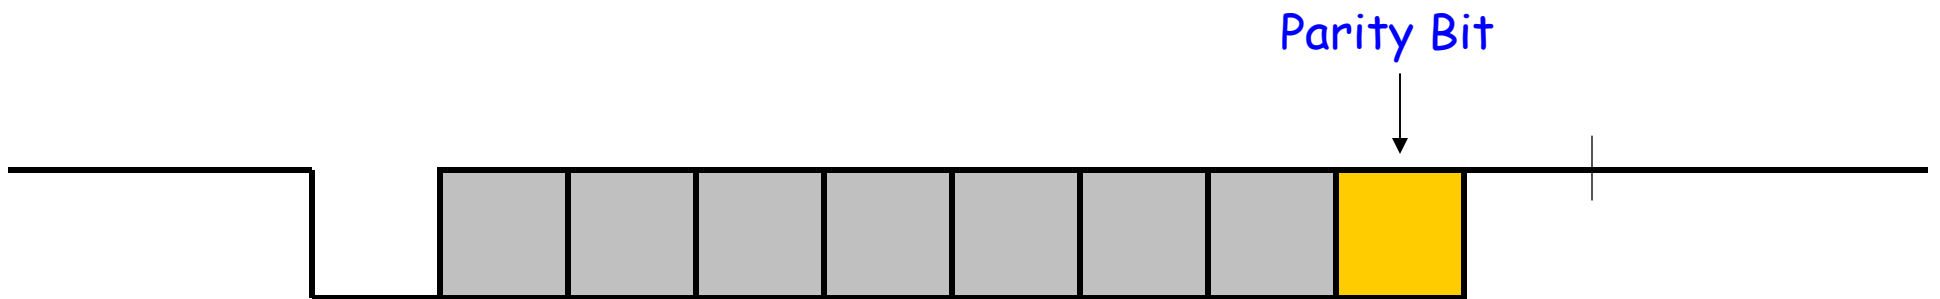


UART Character Transmission

- The **stop bit** marks the end of transmission
- Receiver checks to make sure it is '1'
- Separates one word from the start bit of the next word

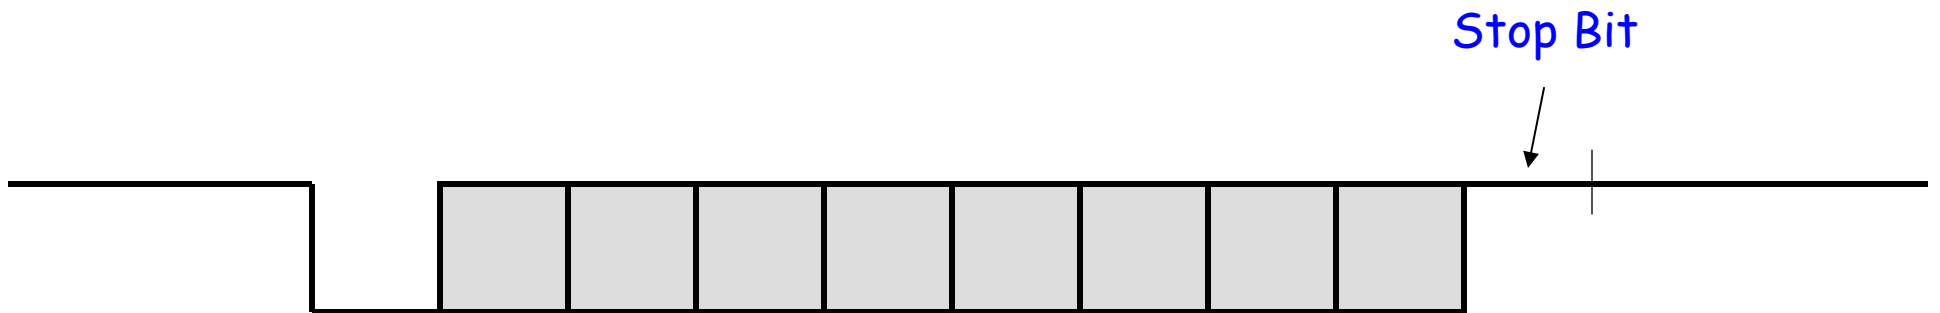


UART Character Transmission

- In the configuration shown, it takes 10 bits to send 7 bits of data

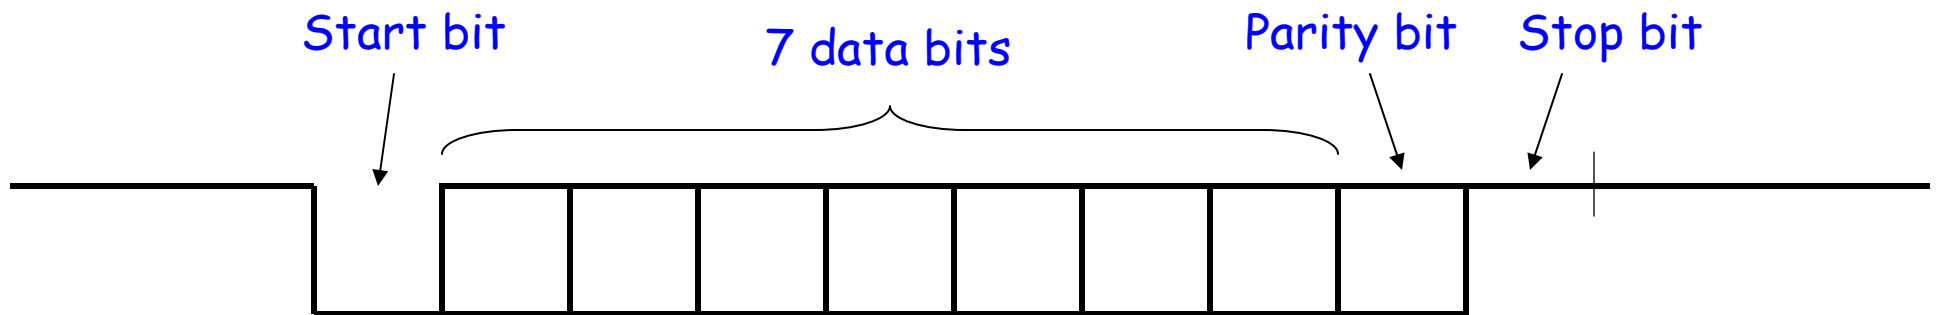


UART Transmission Example

- Send the ASCII letter 'W' (1010111)

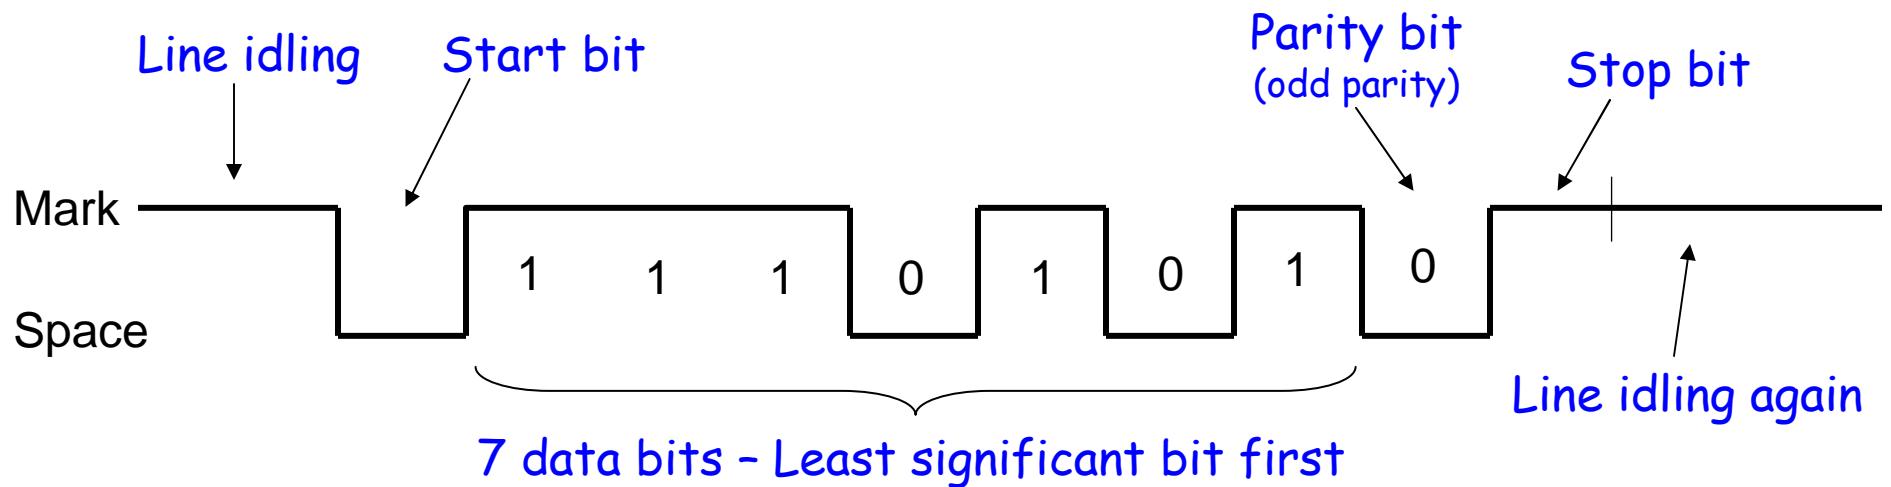

UART Character Reception


Start bit says a character is coming,
receiver resets its timers

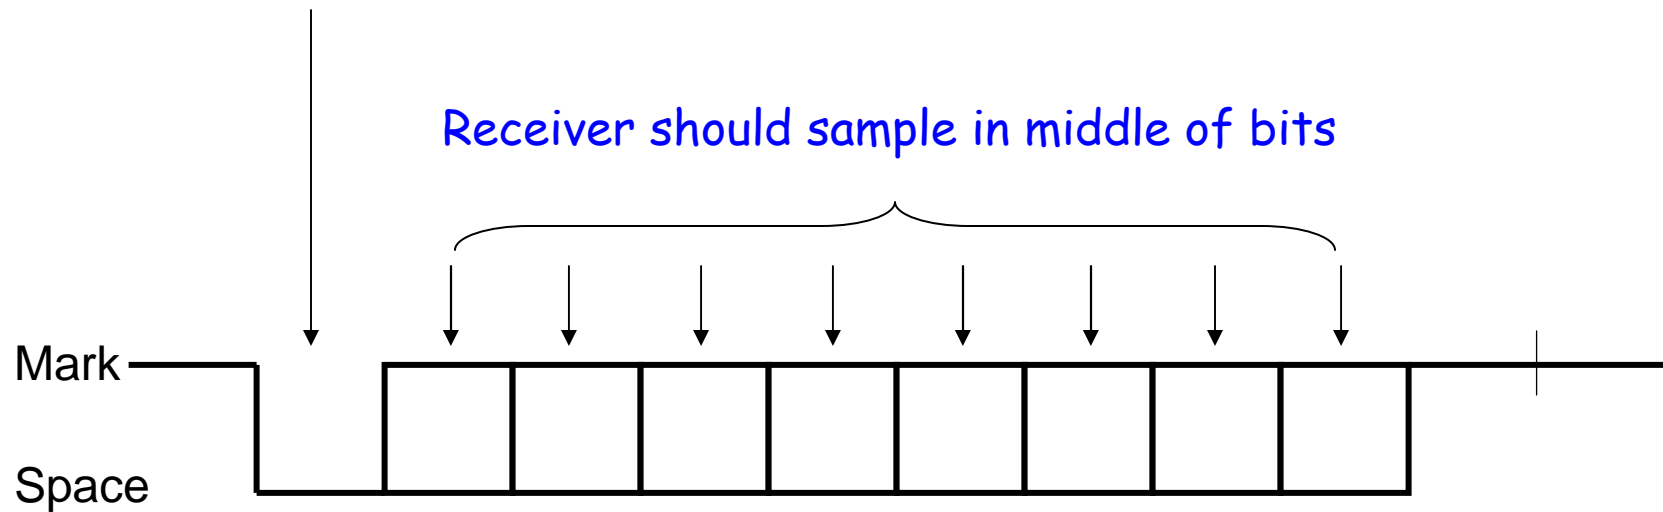

Receiver uses a timer (counter) to time when it samples.
Transmission rate (i.e., bit width) must be known!


UART Character Reception

If receiver samples too quickly, see what happens...

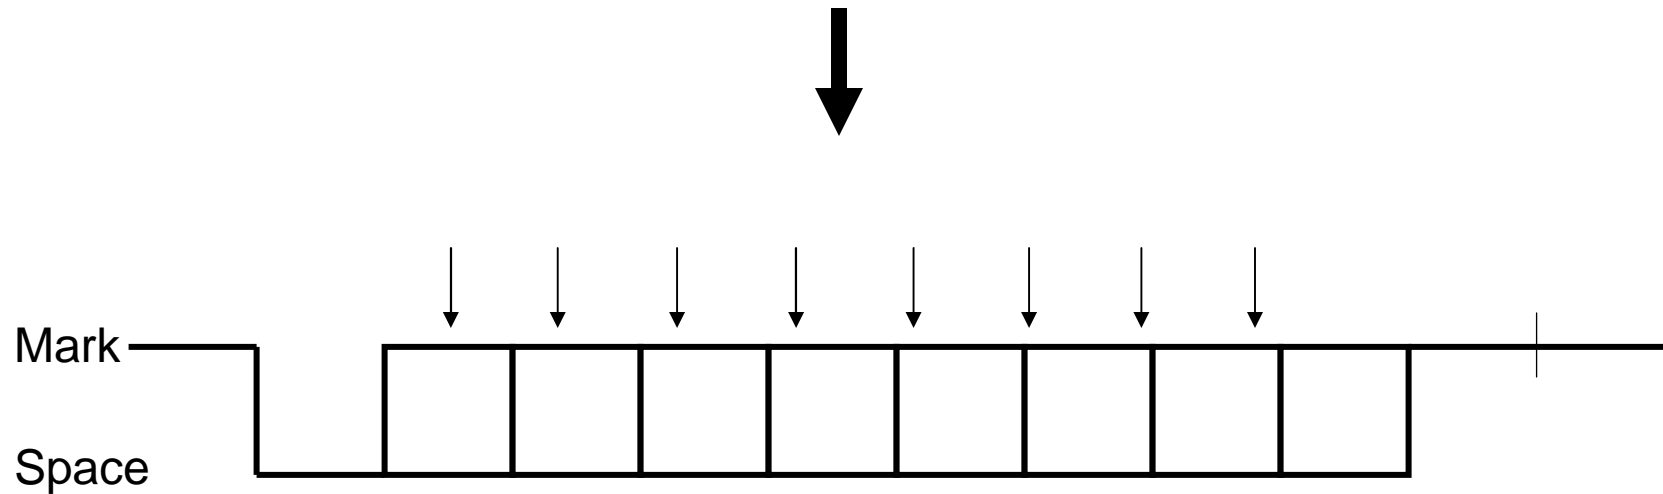

UART Character Reception

If receiver samples too slowly, see what happens...

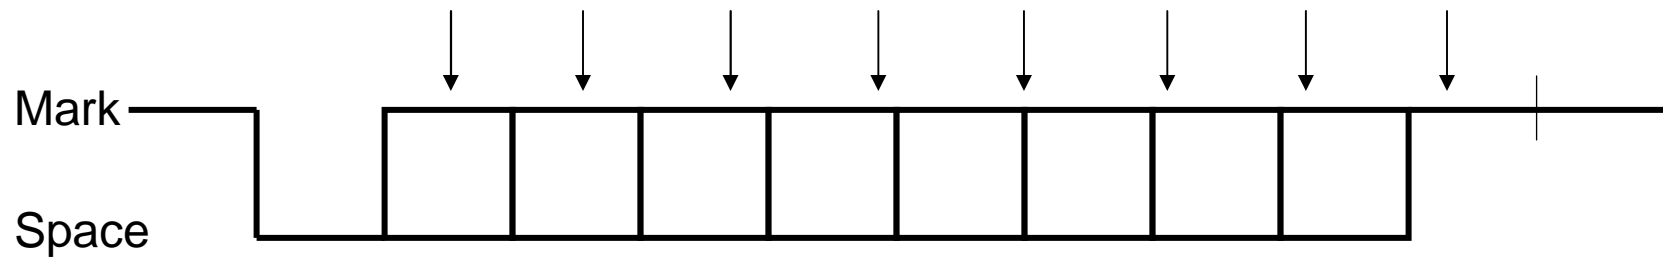

Receiver resynchronizes on every start bit.
Only has to be accurate enough to read 9 bits.

UART Character Reception

- Receiver also verifies that stop bit is '1'
 - If not, reports "framing error" to host system
- New start bit can appear immediately after stop bit
 - Receiver will resynchronize on each start bit

UART Options

- UARTs usually have programmable options:
 - **Data:** 7 or 8 bits
 - **Parity:** even, odd, none, mark, space
 - **Stop bits:** 1, 1.5, 2
 - **Baud rate:** 300, 1200, 2400, 4800, 9600, 19.2K, 38.4k, 57.6k, 115.2k...

UART Options

- Baud Rate
 - The "symbol rate" of the transmission system
 - For a UART, same as the number of bits per second (bps)
 - Each bit is $1/(\text{rate})$ seconds wide
- Example:
 - 9600 baud \rightarrow 9600 Hz
 - 9600 bits per second (bps)
 - Each bit is $1/(9600 \text{ Hz}) \approx 104.17 \mu\text{s}$ long

Not the data
throughput rate!



UART Throughput

- Data Throughput Example
 - Assume 19200 baud, 8 data bits, no parity, 1 stop bit
 - 19200 baud \rightarrow 19.2 kbps
 - 1 start bit + 8 data bits + 1 stop bit \rightarrow 10 bits
 - It takes 10 bits to send 8 bits (1 byte) of data
 - 19.2 kbps \cdot 8/10 = **15.36 kbps**
- How many KB (kilobytes) per second is this?
 - 1 byte = 8 bits
 - 1 KB = 1,024 bytes
 - So, 1 KB = 1,024 bytes \cdot 8 bits/byte = 8,192 bits
 - Finally, 15,360 bps \cdot 1 KB / 8,192 bits = **1.875 KB/s**